



GREEN2 SINGLE-PHASE BATTERY CHARGER

GREEN SERIES INDUSTRIAL CHARGERS

The **GREEN2** is a high-frequency, fully automatic 110 VAC charger for use with lead-acid and lithium batteries. The charger delivers high-energy efficiency and is configurable via front display. The **GREEN2** is wall-mountable and enclosed in a durable steel case.


FEATURES & BENEFITS:

- DC Output from 17 Amps to 70 Amps
- Charge Cycle Begins as Low as 2 Volts
- Soft Start Charging Cycle
- Available in 24-96 Volts
- Suitable for Flooded, AGM, Gel Traction, & Lithium Batteries
- Multi-Current Configurable via Front Display or USB A/B Port
- USB Port Allows Programming & Download of Last 300 Charge Cycles
- 8-Foot AC Cable / 10-Foot DC Cable
- Reverse Polarity Protection
- Wall-Mountable
- cUL & UL/CEC Approved





GREEN2 SINGLE-PHASE BATTERY CHARGER

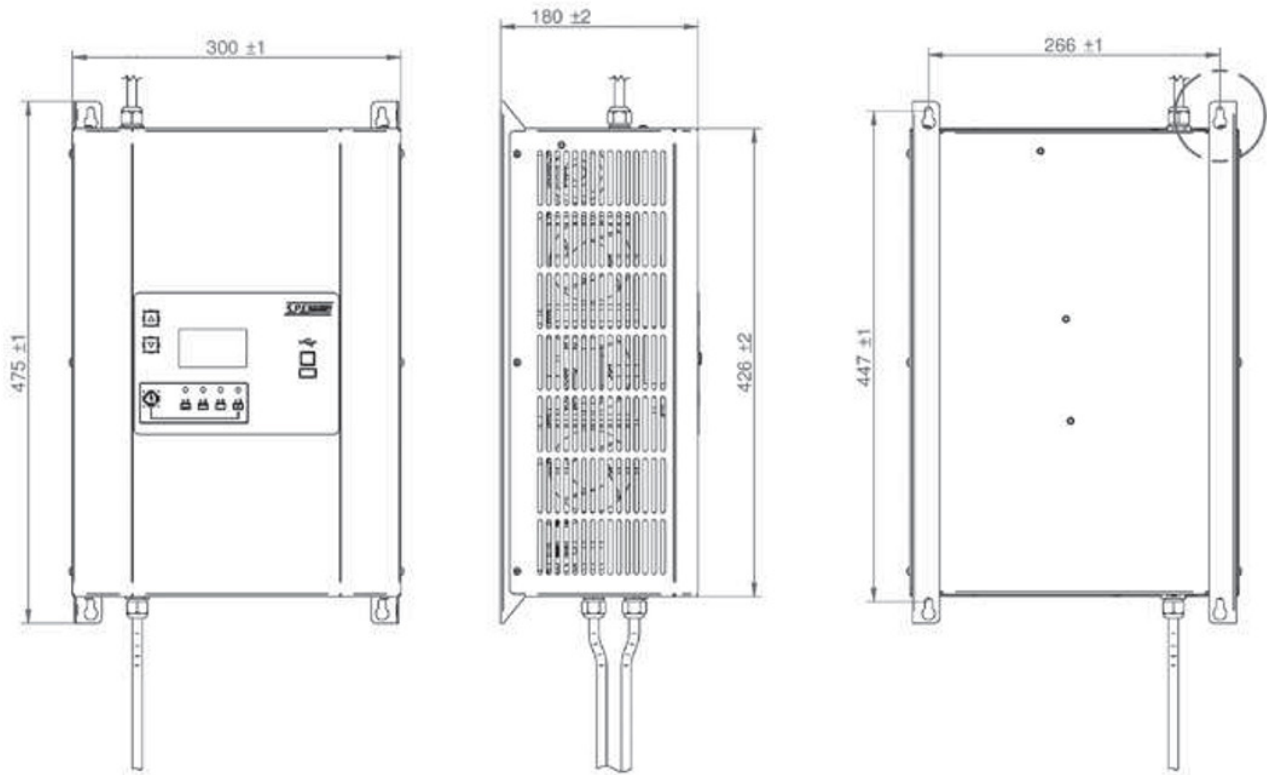

Input Voltage: 110-120 VAC • Weight: 25 lbs

Model	Flooded 8-Hour AH Range (C6)	Max AC Input Current	Input Voltage
24-GREEN2-2470	180AH-700AH	21A	120VAC Single-Phase
24-GREEN2-3645	180AH-450AH	20A	120VAC Single-Phase
24-GREEN2-4840	180AH-400AH	24A	120VAC Single-Phase

- 72 & 80 Volt Chargers Available
- Specialized Charging Curves Available

Dimensions: 11.81" x 7.09" x 18.70" L x W x H • Protection Grade: IP20